

INSTRUCTIONS - PARTS LIST



Form 306-938

PUBLISHED NOV. 1966

RETAIN THIS FORM
FOR
FUTURE REFERENCE

COVER-MOUNTED AGITATOR


FOR 55 GAL OPEN DRUM

Model **207-199**


- Air driven
- Covered inspection port
- Versatile
 - Mount suction tube or bung-type Standard, Monark or President pump in 2" bung adapter
 - Remove bung adapter plate and mount divorced, 2 tie rod Monark or President pump
 - Add accessory adapter plate and mount divorced, 3 tie rod Monark pump
- Accessories on back page

INSTALLATION

Attach agitator and gasket to cover, using the 4 screws and lockwashers provided. See drawing. Connect air hose. For further instruction, see Form 306-840.

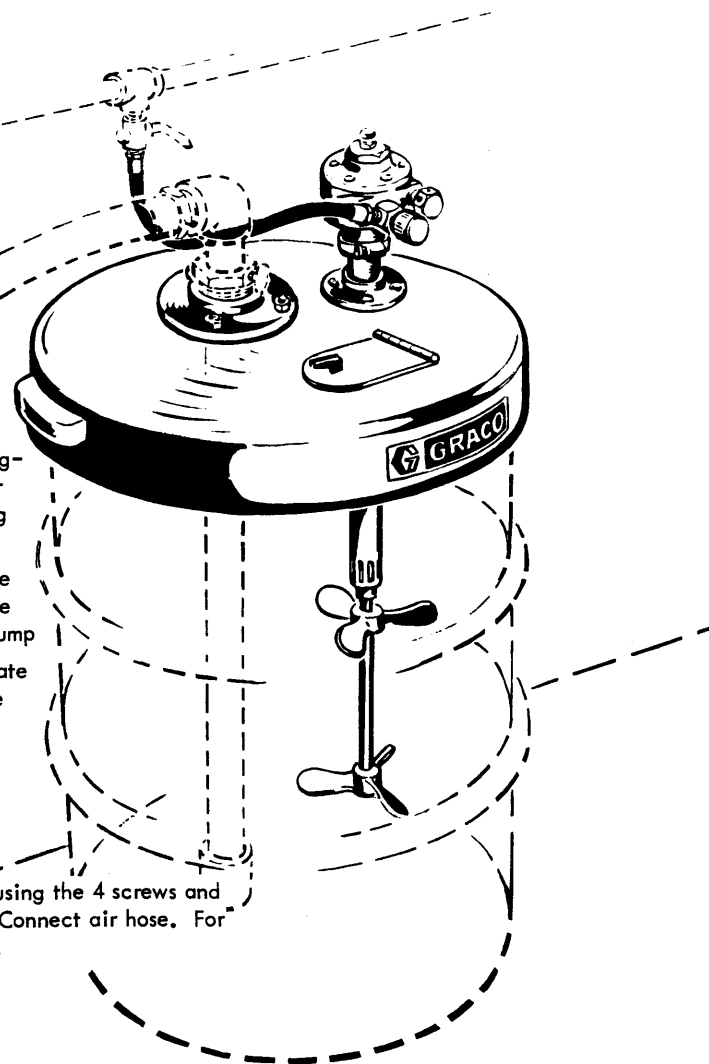

207-199
COVER & AGITATOR ASSY.

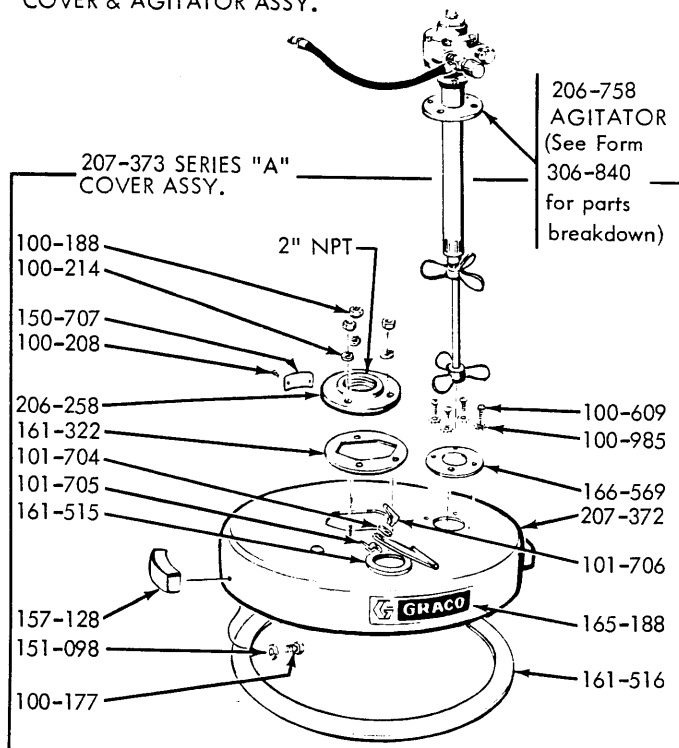

Repair parts must be ordered by number and name. Also give model number and series letter of assembly for which parts are ordered. Call or write the Graco distributor where your unit was purchased, or your nearest Graco factory branch or service depot for parts or service.

PARTS LIST

PART NO.	DESCRIPTION	QTY.
100-177	SCREW, hex hd; self tapping; type "2"; No. 10 thd; $\frac{3}{8}$ lg	4
100-188	NUT, hex; 5/16-18 thd	3
100-208	RIVET, hollow; $\frac{1}{8}$ dia; 5/32 lg	2
100-214	LOCKWASHER, spring; 5/16" screw size	3
100-609	SCREW, rd hd mach; $\frac{1}{4}$ -20 thd; $\frac{3}{8}$ lg	4
100-985	LOCKWASHER, ext shakeproof; $\frac{1}{4}$ screw size	4
101-704	WASHER, flat; inspection hole cover	1
101-705	PAWL, inspection hole cover	1
101-706	HANDLE, inspection hole cover	1
150-707	PLATE, model number and series letter	1
151-098	WASHER, flat	4
157-128	HANDLE, cover	2
161-322	GASKET, pump mounting	1
161-515	GASKET, inspection hole	1
161-516	GASKET, drum cover	1
165-188	DECAL, "Graco"	1
166-569	GASKET, agitator mounting	1
206-258	BUNG ADAPTER Assy	1
206-758	AGITATOR Assy (See Form 306-840 for parts breakdown)	1
207-372	COVER Assy	1
207-373	Series "- 55-GAL DRUM COVER Assy	1


ACCESSORIES (Must be purchased separately)

The GRACO Warranty

Based on the logical assumption that manufacturing and material deficiencies will manifest themselves within twelve months' time, all equipment sold under the Graco trademark is guaranteed for twelve months from date of purchase, by the original purchaser, against defective material and workmanship (but not against damage or wear caused by misuse, abrasion, corrosion, negligence, accident, faulty installation, or tampering in a manner to impair its normal operation), when the equipment is installed and operated in accordance with factory recommendations and instructions.

The Gray Company, Inc., will repair or replace free of charge, all such defective parts if returned prepaid to the factory or to an authorized Graco Service Depot. In all cases within the guarantee period where examination indicates damage due to causes other than defectiveness, repairs will be made at a reasonable charge. Purchased assemblies which are incorporated into Graco equipment, carry the manufacturer's regular warranty.

206-108 ADAPTER PLATE
FOR 23:1 MONARK PUMP
(Must be purchased separately)

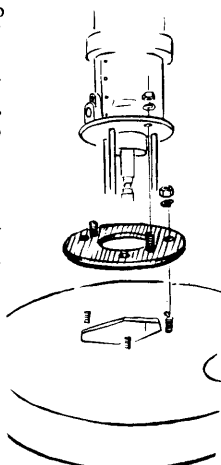

206-266 55 GAL. SIPHON TUBE		
PART NO.	DESCRIPTION	QTY.
156-591	ELBOW, 90°; $\frac{3}{4}$ " n.p.t.;	1
156-593	SEAL, "o" ring	1
156-592	TUBE, riser	1
150-994	ADAPTER, BUNG	1
100-220	THUMBSCREW	1
159-100	RETAINER, screen	1
161-377	SCREEN, filter	1
159-101	NUT, screen retainer	1

$\frac{3}{4}$ " NPT → 204-729 SUCTION HOSE
For hydrocarbon solvent flushing, not for water base.
160-049 SUCTION HOSE
For petroleum base solvent flushing & water base materials.



Factory Branches: ATLANTA, CHICAGO (Broadview), CLEVELAND, DETROIT (Southfield), FT. LAUDERDALE, HOUSTON, LOS ANGELES, PHILADELPHIA, ST. LOUIS, SOUTH SAN FRANCISCO, WEST CALDWELL (N.J.),

In Canada: TORONTO and BURNABY.

Minneapolis, Minnesota 55413

Form 306-938
Nov. 1966

PRINTED
IN
U.S.A.

Parts Change Notice

Some parts in Rev. A (dated Nov 1966) of manual 306-938 have changed but have not yet been changed in the instruction manual. Please note the changes below and mark them in your manual or keep this sheet with your manual.

Assembly No.	Series Letter Change	Part That Changed	Ref No.	Part Description	Description of Change
Model 207-199 Cover-Mounted Agitator (also see note below)	—	207-373	none	Drum Cover Assembly	Replaced by Part No. 237-306 Drum Cover Assembly. Refer to manual 308-466 for parts. The following parts are also deleted from the Parts List: 100-177 through 166-569, and 207-372.
Model 206-266 Siphon Tube		150-994	none	Bung Adapter	Replaced by Part No. 176-684 Bung Adapter.

NOTE: The Parts List for 207-199 should include the following numbers only:

206-258 Bung Adapter Assembly

206-758 Agitator Assembly (see manual 306-840 for parts)

237-306 Drum Cover (see the chart above).



All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.