

INSTRUCTIONS



307856

Rev. E



This manual contains important warnings and information.
READ AND KEEP FOR REFERENCE.

INSTRUCTIONS

First choice when
quality counts.™

Reverse-A-Clean IV

The Reverse-A-Clean tip guard assembly offers features beyond that of any other reversible spray tip. The aerodynamic DripLess™ Tip Guard provides greater safety and convenience to the painter. The SwitchTip™ spray tip is easily removed and replaced. For your safety, carefully follow the instructions below.

⚠ WARNING

Failure to install or use the RAC IV tip guard assembly correctly may result in an undirected spray of paint into the eyes or on the skin of the operator. Be sure you:

- Fully insert the SwitchTip spray tip into the guard.
- Turn the SwitchTip handle so it is parallel to the gun nozzle. See Fig. 1.
- When replacing a worn spray tip, always install a new gasket and seat.

1. Fully insert the SwitchTip spray tip into the housing.
2. Tighten the guard onto the gun nozzle using a wrench to snug it. Do not overtighten.
3. Be sure the handle of the SwitchTip spray tip is in the **FULL SPRAY** or **FULL CLEAN** position, which is parallel to the nozzle of the spray gun.

Use the black rubber gasket ONLY with latex and oil-based paints, stoddard solvents, mineral spirits, turpentine, and water.

With all hot solvents, including lacquer thinner, MEK, trichloroethane, acetone, brush cleaner, xylol, any unknown solvents, **use only the yellow plastic gasket.** The yellow gasket can also be used with the solvents listed for the black gasket.

4. Additional gaskets and seats are available by ordering part number 243004.

To reduce the risk of undirected spray of paint:

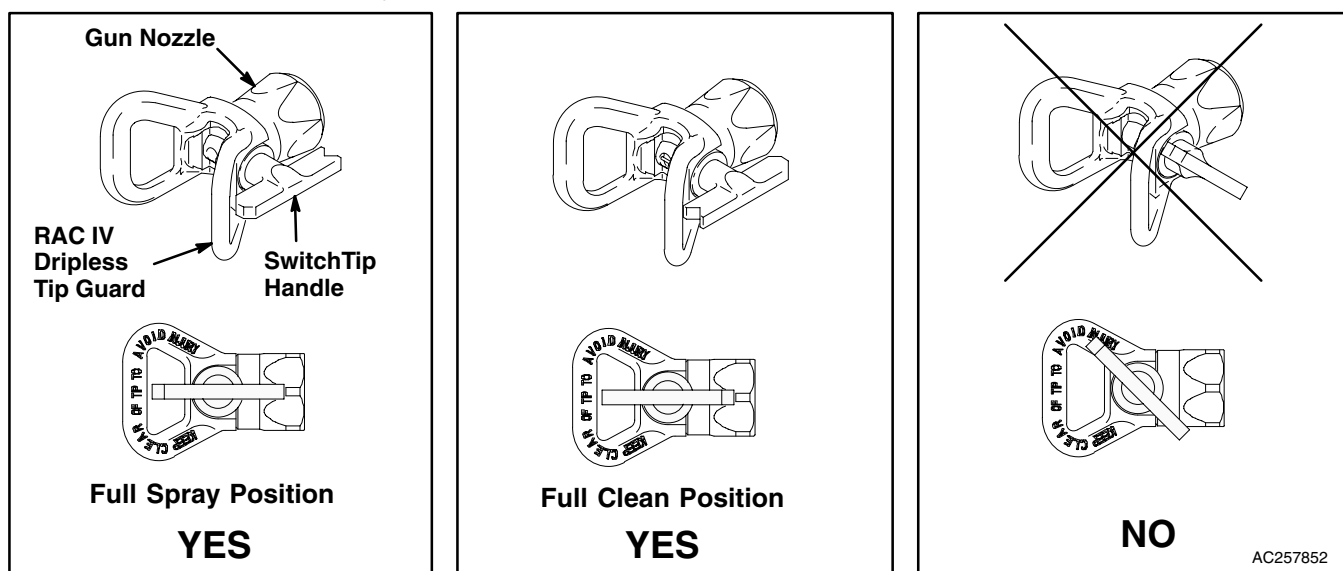


Fig. 1

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

©COPYRIGHT 1997, GRACO INC.

Graco Inc. is registered to I.S. EN ISO 9001


RAC IV Tip Guard Assembly

NOTES:

- Do not mix parts for the RAC III with the new RAC IV. They are not compatible.

Black Rubber Gasket and Seat

- A **black** rubber gasket and metal seat are packaged with each SwitchTip spray tip. The black rubber gasket allows the SwitchTip spray tip to be removed and replaced without using tools. Always use a wrench to tighten the tip guard nut onto the gun nozzle.

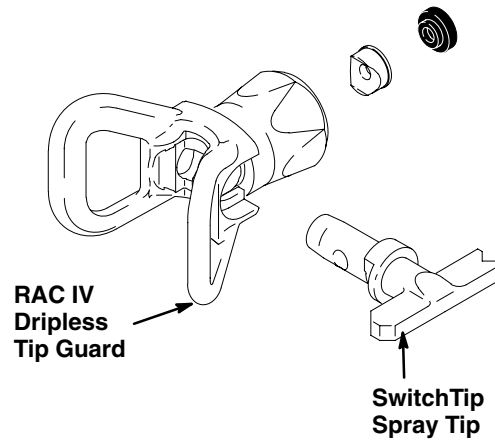

Graco Phone Number

TO PLACE AN ORDER, contact your Graco distributor, or call this number to identify the distributor closest to you:
1-800-690-2894 Toll Free.

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Sales Offices: Minneapolis, Detroit
International Offices: Belgium, Korea, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

PRINTED IN U.S.A. 307856 July 1987, Revised 3/2003