

INSTRUCTIONS-PARTS LIST




308-053

Rev A

KEEP FOR REFERENCE

SUCTION HOSE KIT 223-734

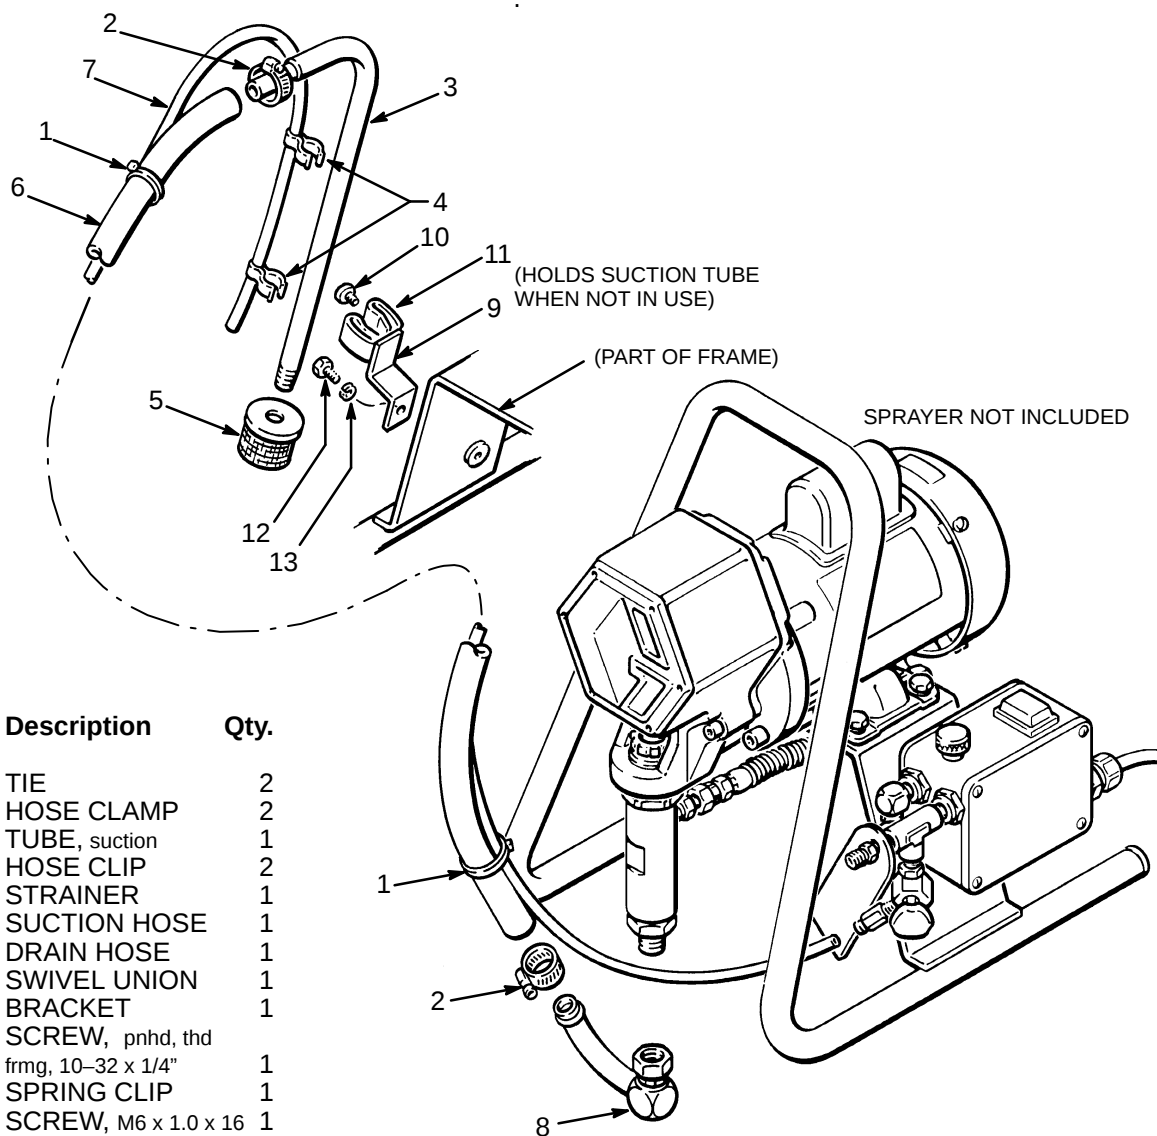

Ref No.	Part No.	Description	Qty.
1	103-473	TIE	2
2	103-927	HOSE CLAMP	2
3	170-113	TUBE, suction	1
4	178-342	HOSE CLIP	2
5	181-073	STRAINER	1
6	186-466	SUCTION HOSE	1
7	186-465	DRAIN HOSE	1
8	110-915	SWIVEL UNION	1
9	186-468	BRACKET	1
10	109-032	SCREW, pnhd, thd frmg, 10-32 x 1/4"	1
11	110-924	SPRING CLIP	1
12	104-966	SCREW, M6 x 1.0 x 16	1
13	108-050	LOCKWASHER, M6	1

Attach the swivel union (8) to the pump intake valve as shown. When properly assembled, the suction tube (3) hangs vertically to the right of the sprayer. This position allows the suction tube to sit in a paint container without knocking it over, and it allows the tube to properly clip into the storage position (as shown in the drawing) when not in use.

To properly position the suction tube, loosen both hose clamps (2). Rotate the suction hose (6) and tube as required. Tighten the hose clamps firmly to prevent air leakage which causes difficult priming. Verify that the suction tube properly clips into the storage position.

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

©COPYRIGHT 1990, GRACO INC.
308-053 3/90