

Instruction Manuals 308-228 and 308-229
contain IMPORTANT WARNINGS AND INSTRUCTIONS
for the Husky 307 Spray Systems.
READ AND RETAIN FOR REFERENCE.


Surge Tank Gaskets

For 111-793 Nylon Surge Tank, used on Model 235-365, 235-366,
235-640, 235-660, and 235-837 Husky™ 307 Spray Systems

112-035 EPDM Gasket (Orange)
Shipped installed in Surge Tank

111-885 Viton® Gasket (Green)
Shipped loose

NOTE: Be sure that the fluid you are pumping is compatible with the nylon body of the surge tank. Refer to the Compatibility Chart on the back of this sheet for information regarding which gasket to use with certain fluids. For additional application information, contact Graco Technical Assistance (see the back of this sheet for the toll-free phone number).

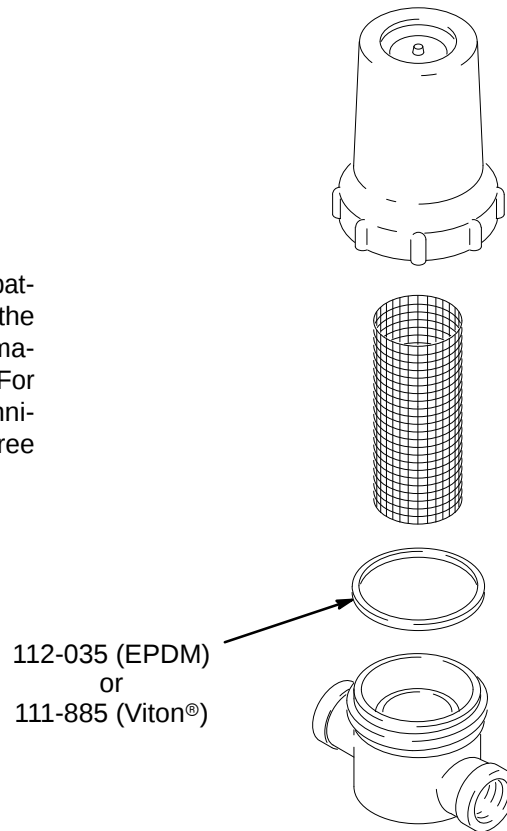

FLUID COMPATIBILITY CHARTS

WARNING

The following charts are guides to selecting the gasket that is compatible with the fluid you will be pumping. It is the responsibility of the user to read and follow the recommendations of the fluid manufacturer, and any local, state, and federal guidelines for safe handling of a particular fluid. If the fluid you are pumping is not compatible with the supplied EPDM or Viton gaskets, obtain a compatible, 2 in. (50.8 mm) I.D. x 0.125 in. (3.2 mm) cross-section (size 226) o-ring locally. All fluids must be compatible with the nylon body of the surge tank.

EPDM (Ethylene Propylene) performs well under both low and high temperatures, and does not swell or absorb fluid. It is resistant to a wide range of oxygenated solvents such as alcohols, glycol ethers, and ketones. It is not recommended for aliphatics, aromatics, or naptha. Refer to the charts below.

Viton® (Fluorinated Hydrocarbon) is resistant to aliphatics, aromatics, glycol ethers, naptha, and isopropyl alcohol. It is not recommended for methyl alcohol or ketones, and does not perform well in temperatures near 32°F (0°C). Refer to the charts below. *Viton® is a registered trademark of the DuPont Company.*

FLUID	EPDM (Installed)	Viton® (Optional)
Methyl Ethyl Ketone	YES	NO
Acetone	YES	NO
Ethyl Acetate	YES	NO
Isopropyl Acetate	YES	NO
Butyl Acetate	YES	NO
Methyl Acetate	YES	NO
Butyl Cellosolve	YES	NO
Methanol	YES	NO
Ethanol	YES	NO
Butanol	YES	YES
Propanol	YES	YES
Isopropyl Alcohol	YES	YES
Ethylene Glycol	YES	YES

FLUID	EPDM (Installed)	Viton® (Optional)
Benzene (Benzol)	NO	YES
Toluene (Toluol)	NO	YES
Xylene (Xylol)	NO	YES
Hexane	NO	YES
Napthalene	NO	YES
Carbon Tetrachloride	NO	YES
Methyl Chloride	NO	YES
Methylene Chloride	NO	YES
Gasoline (petrol)	NO	YES
Naptha	NO	YES
Mineral Spirits	NO	YES
Trichloroethane	NO	YES
Trichloroethylene	NO	YES

TOLL-FREE PHONE NUMBERS

TO PLACE AN ORDER, contact your Graco distributor, or call this number to identify the distributor closest to you: **1-800-328-0211 Toll Free**

FOR TECHNICAL ASSISTANCE, service repair information or assistance regarding the application of Graco equipment: **1-800-543-0339 Toll Free**

Sales Offices: Atlanta, Chicago, Dallas, Detroit, Los Angeles, Mt. Arlington (N.J.)
Foreign Offices: Canada; England; Switzerland; France; Germany; Hong Kong; Japan; Korea
GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

PRINTED IN U.S.A. 308-268 1-93