



INSTRUCTIONS

This manual contains important warnings and information.
READ AND KEEP FOR REFERENCE.

Gravity and Siphon Cups

Gravity Cup

Setup

1. Insert the fluid filter (4) into the cup outlet if the fluid requires filtering or install the washer (5) into the gun fluid fitting. See Fig. 1.
2. Screw the cup hand-tight onto the gun. See Fig. 2.
3. Remove the cup lid (2) and fill the cup with fluid.
4. Tighten the lid (2) onto the cup (3).

NOTE: A cup holder is included with the gun and cup assembly. Make sure the mounting surface and hardware used to mount the cup holder will support the weight of the gun and cup with fluid in it.

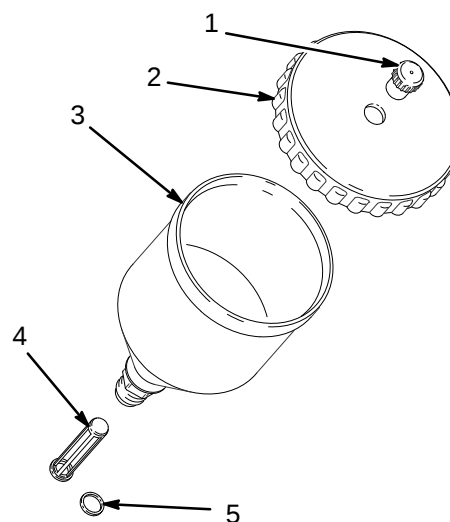


Fig. 1

7615A

Cleaning

1. Remove the cup lid (2) and pour the paint out of the cup (3).
2. Pour a small amount of clean solvent into the cup (3) and install the cup lid (2).
3. Shake the cup to clean the inside.
4. Spray solvent through the gun to clean the inside of the gun fluid section.
5. Repeat steps 2-4 until the cup and gun are clean.
6. Pour the solvent out of the cup (3) and wipe it dry.

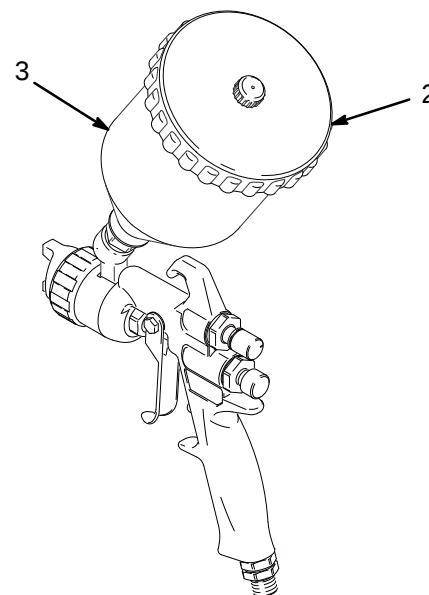


Fig. 2

7648A

Siphon Cup

Setup

1. Push the clamp lever (A) fully to the unclamped position, against the yoke (B). See Fig. 3.
2. Twist the cup lid (101) counterclockwise to disengage the yoke hook from the cup extended pins (C).
3. Remove the cup lid (101) and fill the cup with fluid.
4. Twist the cup lid (101) clockwise to engage the yoke (B) hook, then push the clamp lever (A) fully to the clamped position. Use your thumb to force the clamp lever into position; do not use wrenches or tools to move it.
5. Securely connect the cup assembly onto the gun fluid inlet, using a wrench on the swivel nut (E).

Cleaning

1. Push the clamp lever (A) fully to the unclamped position, against the yoke (B). See Fig. 3.
2. Twist the cup lid (101) counterclockwise to disengage the yoke hook from the cup extended pins (C).
3. Remove the cup lid (101).
4. Clean the cup lid (101) and cup (103) with solvent.

CAUTION

When cleaning the cup lid (101), avoid prolonged exposure of the gasket (102) and vent tubing (D) to solvent as this will cause it to swell.

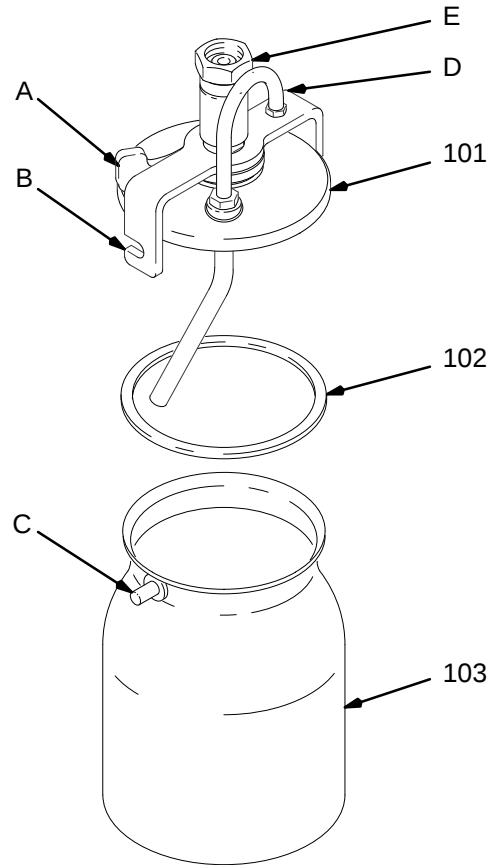


Fig. 3

7617A

Parts


Use Only Genuine Graco Parts and Accessories

One Quart Siphon Cup

Part No. 239-582

Includes the following parts:

Ref. No.	Part No.	Description	Qty.
101	239-583	LID, cup; Includes item 102	1
102	189-883	GASKET, polyethylene foam	1
103	239-727	CUP, 1 quart (0.95 liter)	1

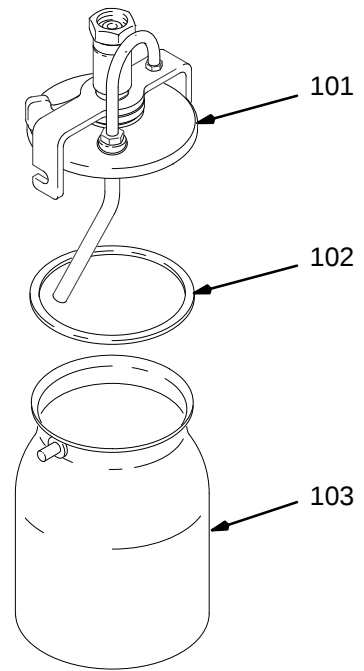

239-582 shown

7617A

One Pint Siphon Cup

Part No. 239-584

Includes the following parts:


Ref. No.	Part No.	Description	Qty.
101	239-713	LID, cup; Includes item 102	1
102	189-883	GASKET, polyethylene foam	1
103	239-728	CUP, 1 pint (0.48 liter)	1

16 oz. Gravity Cup

Part No. 239-714

Includes the following parts:

Ref. No.	Part No.	Description	Qty.
1	192-337	CAP	1
2	192-341	LID, cup	1
3	239-585	CUP, 16 oz. (474 cc)	1
4	192-338	FILTER, fluid	1
5	192-339	WASHER, nylon	1

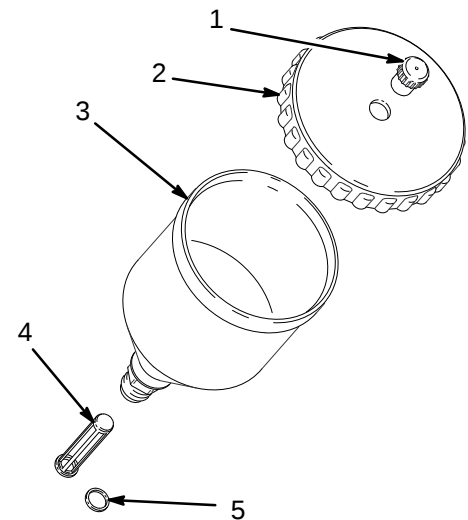

239-714 shown

7615A

8 oz. Gravity Cup

Part No. 239-715

Includes the following parts:

Ref. No.	Part No.	Description	Qty.
1	192-337	CAP	1
2	192-341	LID, cup	1
3	239-586	CUP, 8 oz. (237 cc)	1
4	192-338	FILTER, fluid	1
5	192-339	WASHER, nylon	1

Technical Data

Gravity Cups

Category	Data
Material	
<i>Cup</i>	Nylon
<i>Fluid Fitting</i>	304 Stainless Steel
Fluid Inlet Thread	3/8–18 BSP straight
Weight	
<i>8 oz. (237 ccr)</i>	5.2 oz. (146 g)
<i>16 oz. (474 cc)</i>	6.2 oz. (174 g)

Siphon Cups

Category	Data
Material	
<i>Cup, Tube, Seat, Nut</i>	304 Stainless Steel
<i>Lid</i>	Glass-filled Nylon
<i>Sleeve, Clamp Arm</i>	Electroless Nickel-plated Aluminum
<i>Yoke</i>	Electroless Nickel-plated Steel
<i>Cup Gasket</i>	Polyethylene Foam
Fluid Inlet Thread	3/8–18 npsm
Weight	
<i>1 qt. (0.95 liter)</i>	1.50 lb. (675 g)
<i>1 pt. (0.48 liter)</i>	1.25 lb. (562 g)

Graco Phone Number

TO PLACE AN ORDER, contact your Graco distributor, or call this number to identify the distributor closest to you:
1-800-367-4023 Toll Free

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Sales Offices: Minneapolis, Detroit, Los Angeles
Foreign Offices: Belgium, Canada, England, Korea, France, Germany, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

<http://www.graco.com>

PRINTED IN U.S.A. 308-792 August 1997