

HandTite™ Tip Guard

4050 psi (280 bar, 28 MPa) Maximum Working Pressure

Model 243161, Series A

- Patented aerodynamic design virtually eliminates paint buildup, dripping, and spitting
- Hand tighten on gun – no tools required
- Fits all Graco Airless Spray Guns
- Accepts Graco RAC™ IV and RAC 5 SwitchTips
- Must purchase SwitchTip™ spray tip separately

⚠ WARNING



To reduce the risk of fluid injection or splashing in the eyes or on the skin, relieve air and fluid pressure in the system before installing, cleaning or changing tips. See **Pressure Relief Procedure** in gun or sprayer manual.

- **Keep clear of spray tip.** High-pressure spray or leaks can inject fluid into the body, resulting in serious injury which may require amputation. Never spray without a tip guard (D).
- Do not exceed 4050 psi (280 bar, 28 MPa) maximum working pressure.


Failure to install or use the RAC™ tip guard assembly correctly may result in an undirected spray of fluid into the eyes or on the skin of the operator. Be sure you:

- Fully insert SwitchTip (A) into tip bore (C) in guard
- Do not trigger gun with SwitchTip handle between **Spray** and **Clear** positions
- Replace OneSeal™ when replacing worn SwitchTip


Installing

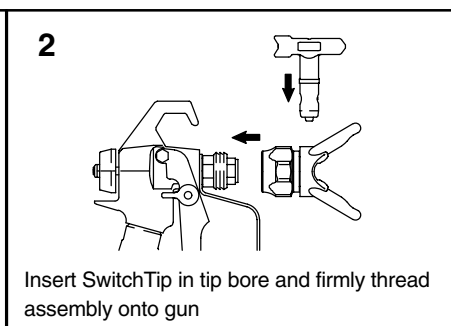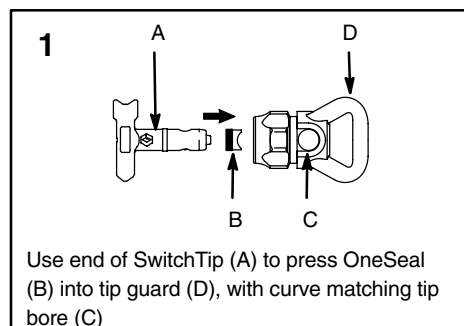

Disassembling

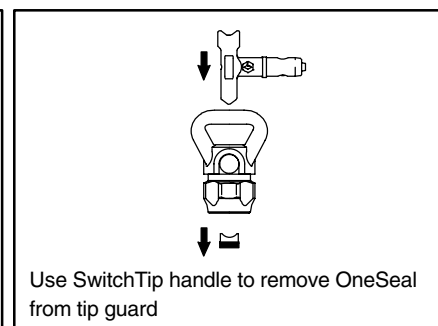

Clearing a Clogged SwitchTip

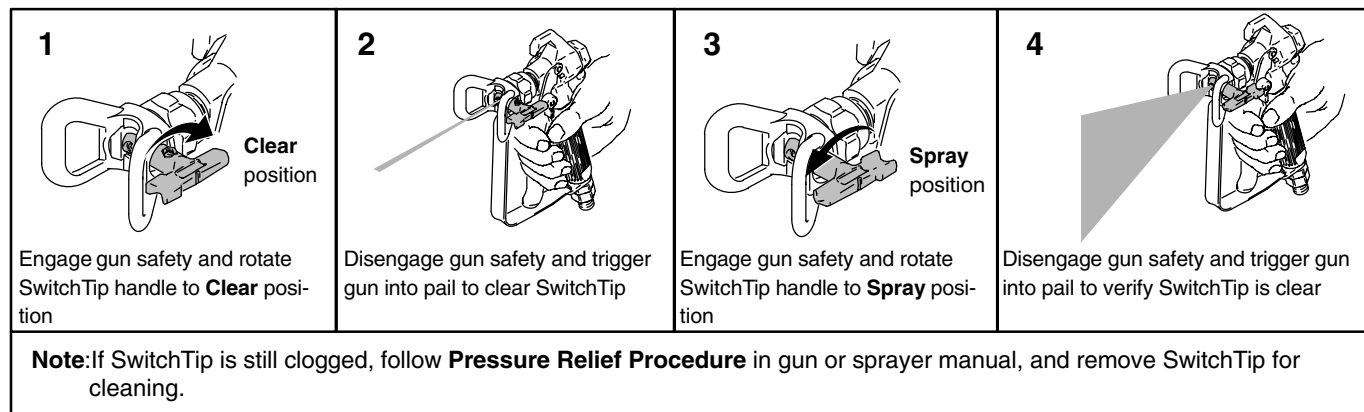

Graco Phone Number

TO PLACE AN ORDER, contact your Graco distributor, or call this number to identify the distributor closest to you: **1-800-690-2894 Toll Free**

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Sales Offices: Minneapolis, Detroit
International Offices: Belgium, Korea, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441
<http://www.graco.com>

PRINTED IN U.S.A. 309055 October 1999, Revised 2/2003