INSTRUCTIONS-PARTS LIST




Rev. A

309166



This manual contains important warnings and information. READ AND KEEP FOR REFERENCE.



5 Liter Hopper Kit 243496

Qty.

1


1

1

1 1

NOTE: See setup on the next page.

Ref. No.	Part No.	Description
1	188787	HOPPER
2	112133	SCREEN
3	243495	TUBE
4	104938	O-RING
5	193237	EXTRUSION, foot

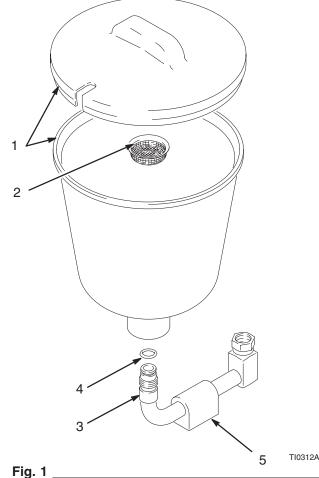

WARNING

The system remains pressurized until pressure is manually relieved. To reduce the risk of serious injury from pressurized fluid, accidental spray from the gun or splashing of any fluid, follow this procedure whenever you:

- are instructed to relieve pressure
- stop spraying
- check or service any system equipment

Pressure Relief Procedure

- 1. Lock the gun trigger safety.
- 2. Turn the ON/OFF switch to OFF.
- 3. Unplug the power supply cord.
- 4. Unlock the gun trigger safety. Hold a metal part of the gun firmly to the side of a grounded metal pail, and trigger the gun to relieve pressure.
- 5. Lock the gun trigger safety.
- 6. Open the pressure drain valve, having a container ready to catch the drainage.

If you suspect that the spray tip or hose is completely clogged, or that pressure has not been fully relieved after following the steps above, VERY SLOWLY loosen the tip guard retaining nut or hose end coupling to relieve pressure gradually, then loosen completely. Now clear the tip or hose.

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441 ©COPYRIGHT 2000, GRACO INC. Graco Inc. is registered to I.S. EN ISO 9001


Setup

1. Relieve pressure.

NOTE: Refer to Fig. 2 except where noted.

- 2. Rinse and dry the inside of the hopper (1).
- 3. Remove the original suction hose. Unscrew the suction hose tube from the pump intake valve.
- 4. Screw the new tube (3) into the pump so it faces straight forward.
- 5. Be sure the o-ring (4, Fig. 1) is in place and then screw the hopper (1) securely onto the tube.
- 6. Be sure the screen (2, Fig. 1) is in place at the inside bottom of the hopper. Refer to the parts drawing on the front of this manual.
- 7. Fill the hopper. Place the lid on the hopper. Put the suction tube into the hole in the lid of the hopper.

1 Not visible





All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

> Sales Offices: Minneapolis, Detroit Foreign Offices: Belgium, Korea, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

PRINTED IN U.S.A. 309166 03/2000