

INSTRUCTIONS-REPAIR



309217

Rev. A



INSTRUCTIONS

KEEP FOR REFERENCE.

Read this and all related manuals for important warnings and instructions.

First choice when
quality counts.™

ProTote™ Tool Kit

243491

Install on 395/495st Pro™, 190ES, Duron Performance Pro 395/495, EuroPro 395/495 and Sherwin Williams Nova/SuperNova Pro airless sprayer models:

395/495st Pro™ and 190ES	Nova/SuperNova Pro	Performance Pro 395/495	EuroPro 395/495
232900	824900	232970	232971
232903	824920	232990	
232906	824932		
232920	824940		
232923			
232926			
232932			
232940			
232943			
232946			
232950			
232952			
232960			

Pressure Relief Procedure

WARNING



INJECTION HAZARD

System pressure must be manually relieved to prevent system from starting or spraying accidentally. Fluid under high pressure can be injected through skin and cause serious injury. To reduce risk of injury from injection, splashing fluid, or moving parts, follow **Pressure Relief Procedure** whenever you:

- are instructed to relieve pressure,
- stop spraying,
- check or service any system equipment,
- or install or clean spray tip.

1. Lock gun safety latch.
2. Turn ON/OFF switch to OFF.
3. Unplug power supply cord.
4. Unlock gun safety latch. Hold metal part of gun firmly to grounded metal pail. Trigger gun to relieve pressure.
5. Lock gun safety latch.
6. Open pressure drain valve. Leave pressure drain valve open until ready to spray again.


If suspected that spray tip or hose is completely clogged, or that pressure has not been fully relieved after following steps above, VERY SLOWLY loosen tip guard retaining nut or hose end coupling to relieve pressure gradually, then loosen completely. Now clear tip or hose obstruction.

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

©COPYRIGHT 2000, GRACO INC.

Graco Inc. is registered to I.S. EN ISO 9001

Installation

1.  Relieve pressure; page 1.
2. Fig. 1. Remove existing plastic cups (A) from sprayer stand.
3. Position ProTote (B) near bends on tubular legs.

CAUTION

Over tightening of self-tapping screws may cause them to break through plastic holes of ProTote.

4. Install three self-drilling/tapping screws (C) through holes in ProTote, as shown.

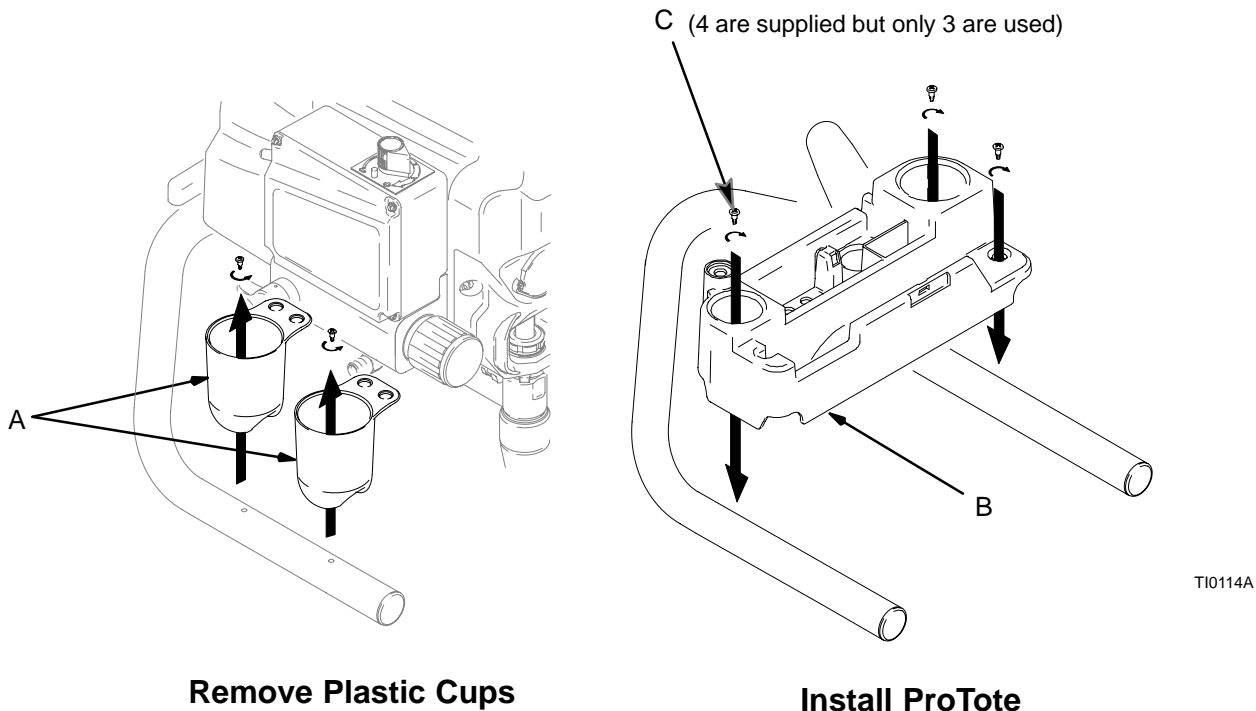


Fig. 1

Graco Phone Number

TO PLACE AN ORDER, contact your Graco distributor,
or call 1-800-690-2894 to identify the nearest distributor.

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Sales Offices: Minneapolis, Detroit
International Offices: Belgium, Korea, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

<http://www.graco.com>

PRINTED IN U.S.A. 309217 06/2000