

Kit, Ground Strap Retrofit

310661 Rev.A

Model Number 248392, Series A

Parts Drawing/List

Installation


- 1 Set grounding strap (1) in paint hopper with vertical rod located 90° from front (either direction will work).
- 2 Use 6 mm drill bit to create holes for bolts (3). Use grounding strap (1) to locate three holes.
- 3 Insert bolts (3) through the holes with the head on the outside of the hopper. Fasten nuts (2) on bolts.



WARNING

When spraying paint into hopper, hold gun firmly in contact with the metal ground strap (1). Only use a conductive Graco airless paint hose.

Ref No.	Part No.	Description	Qty
1	287001	STRAP, ground, hopper	1
2	111100	NUT, acorn, 6 mm	3
3	105468	BOLT, 6 mm	3

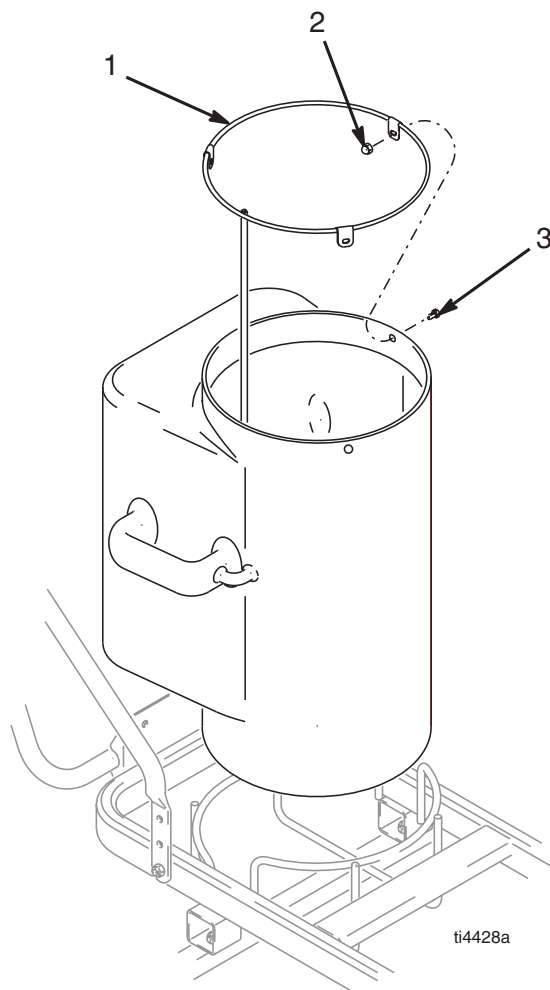

PROVEN QUALITY. LEADING TECHNOLOGY.

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Sales Offices: Minneapolis, Detroit

International Offices: Belgium, Korea, Hong Kong, Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

www.graco.com

Printed in USA 310661A

1/2004