


Instructions



Contractor II Gun Handle Kit

Part No. 287594

311005 Rev.B

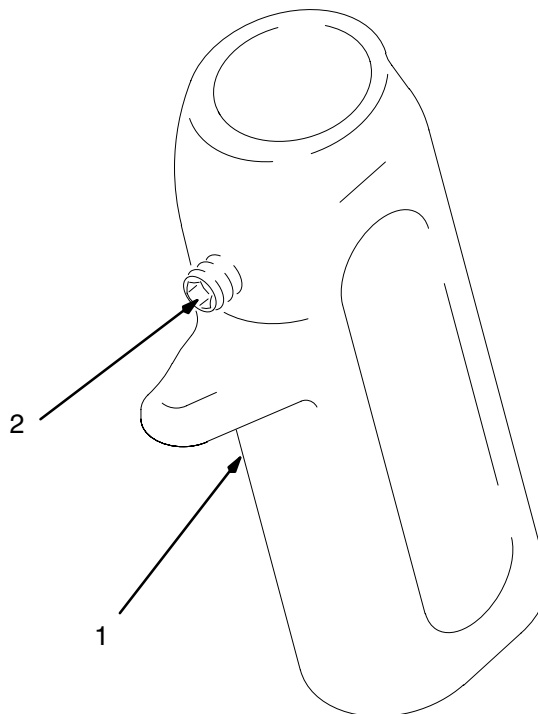

Ref. No.	Part No.	Description	Qty.
1	15B580	HANDLE	1
2	100002	SET SCREW	1

PROVEN QUALITY. LEADING TECHNOLOGY.

Instructions

Removing Handle

Note: Gun should not be attached to hose or sprayer.

1. Disconnect trigger guard from gun body beneath diffuser by pushing up on guard hook and pulling it out of notch.

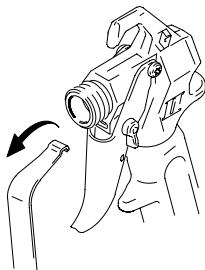


Fig. 1

2. The trigger guard, beneath the gun body, can then be used as a wrench to loosen the nut.

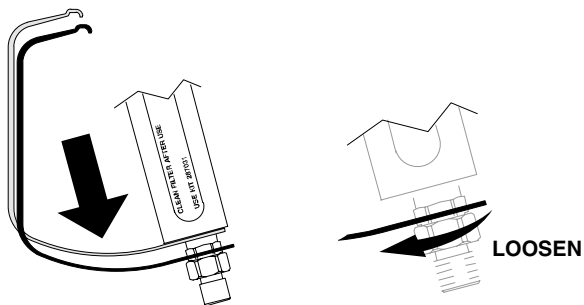


Fig. 2

3. Once nut is loosened, use your hand to twist handle and remove it from gun head.

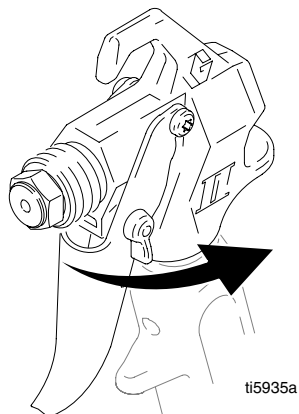


Fig. 3

Installing Handle

1. Attach new handle (1) provided in kit to gun head.

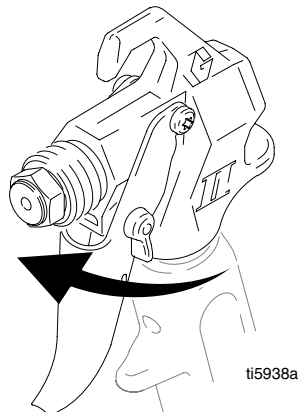


Fig. 4

2. Tighten handle (1) by hand until it is firmly seated in fluid head or use trigger guard to tighten nut

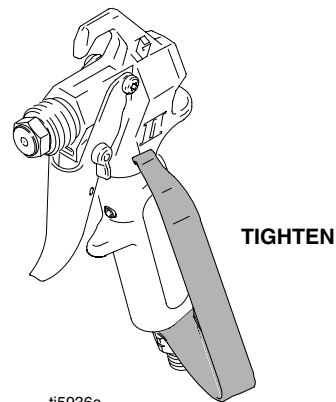


Fig. 5

3. Loosen set screw; turn handle (1) until set screw is aligned with notch in gun head. Use an Allen wrench to tighten set screw (2).

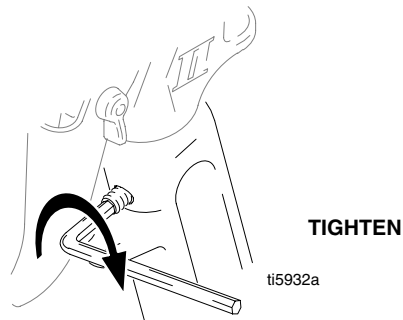


Fig. 6

4. Reattach trigger guard to gun.