


Merkur[®] Seal Repair Kits

406769F

For Model LW025A (25 cc) Merkur Displacement Pumps


ΕN

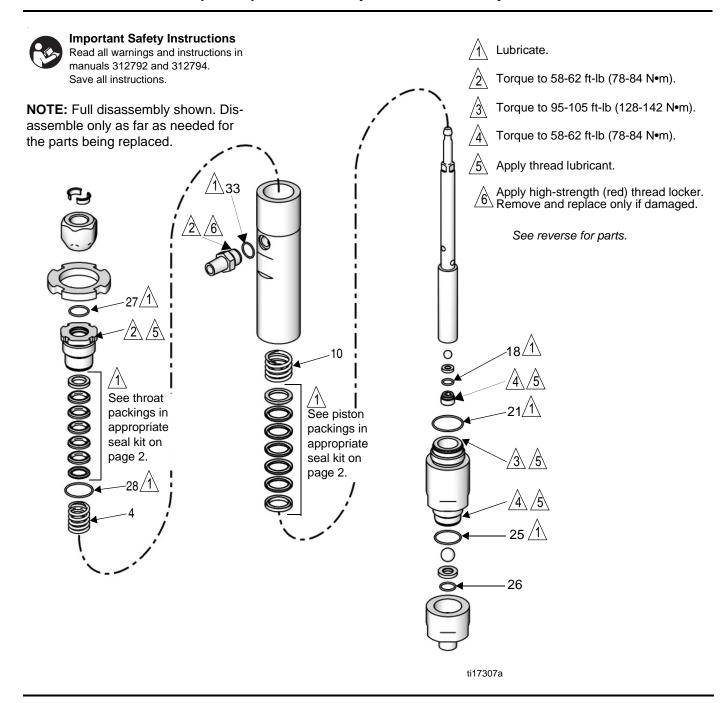

Ref. Description		Qty.
4	SPRING, throat	1
6	GLAND, male, throat	1
7	PACKING, throat, UHMWPE	3
8	PACKING, throat, PTFE	2
9	GLAND, female, throat	1
10	SPRING, piston	1
11	GLAND, male, piston	1
12	PACKING, piston, UHMWPE	3
13	PACKING, piston, PTFE	2
14	GLAND, female, piston	1
18	O-RING, piston, 0.57 in (14.4 mm) OD	1
19	PACKING, throat, reinforced PTFE	5
20	PACKING, piston, reinforced PTFE	5
21	O-RING, lower cylinder, 1.4 in. (36 mm) OD	1
25	O-RING, lower cylinder, 1.2 in. (30 mm) OD	1
26	O-RING, inlet check, 0.75 in. (19 mm) OD	1
27	O-RING, wet cup, 0.9 in. (23 mm) OD	1
28	O-RING, wet cup, 1.3 in. (33 mm) OD	1
33	O-RING, outlet fitting, 0.59 in. (14.9 mm) OD	1

TIP: Some o-rings are close in size. Stack on bench to differentiate.


Standard Seal Repair Kit 24A251



Lubricate Packings

Optional Seal Kits: 24J852 - Carbon-Filled PTFE 26C707 - Reinforced PTFE

Use with materials that cause chemical compatibility concerns with UHMWPE, such as acid catalyst materials.



Lubricate Packings

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 406769

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2008, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.