

FOOT VALVE M 26 X 1.5 DN 20

Non-return valve used as a foot valve for a suction unit, suction tube

Part number 77582 001002

SPECIAL COMPATIBILITY

The foot valve is preferably used with the diaphragm pump Regulus 001.085-DP.

It improves the suction behavior of the pump in long suction lines, and prevents the material from flowing out of the suction tube when the container is changed.



TECHNICAL DATA

Nominal width	DN 20
Operating excess pressure max. permissible	8 bar
Operating temperature max. permissible	80° C
Weight	440 g



Use is only permitted with low-pressure pumps (operating overpressure max. 8 bar).
– Pressure buildup in the suction system with a defective suction valve.

CONSTRUCTION MATERIALS

All metal parts	SST (1.4305 / 1.4310)
Valve cone	POM

ATTACHMENT POSITION

Vertical position or in a position slightly departing from the vertical

Replacement for issue of 06.92

Subject to change

Page 01 of 02

Prepared by 22.04.99 Hilse

Checked 23.04.99 Wote


USER INFORMATION
- TECHN. PRODUCT DESCRIPTION -

Issued


10.99

B.13.25.01-P

GROUNDING

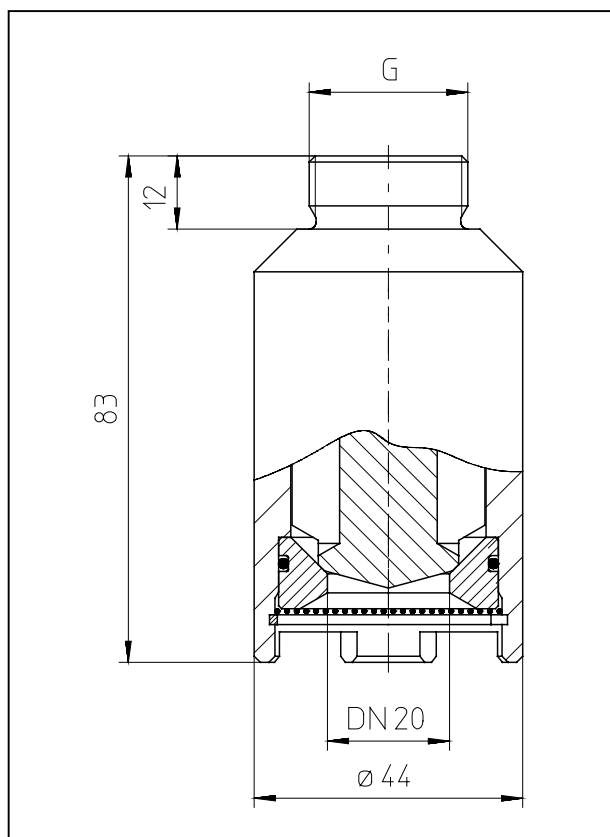

REPLACEMENT PARTS

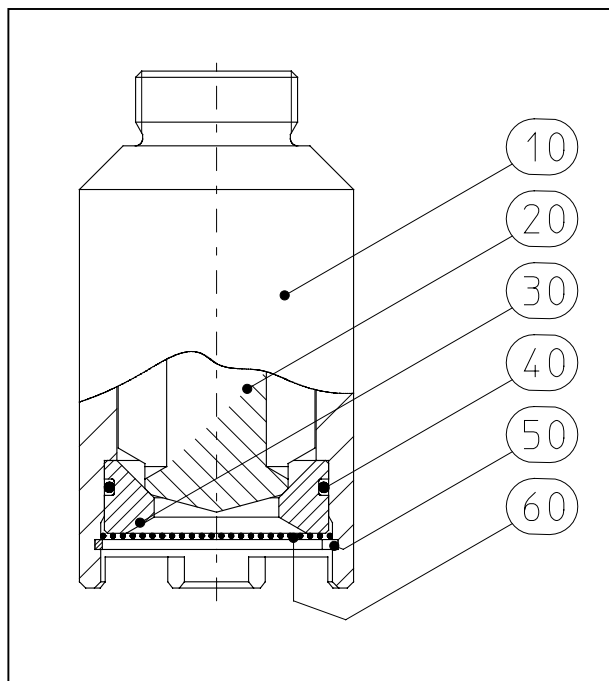

Pos	Description	Part number
10	Valve housing	76514 016003
20	Valve cone D23	76272 008001
30	Valve seat D20	76275 032003
40	O-Ring 32 x 2 B	74186 044020
50	Locking ring 37x1.5	74124 026000
60	Strainer insert D 37	76648 085001

GRACO N.V.
 Industrierrein "Oude Bunders"
 Loc. 2206 - Slakweidestraat 31
 3630 Maasmechelen - Belgium
 Tel.: 32 89 770 700 Fax: 32 89 770 777