

INSTRUCTIONS—PARTS LIST



308-303

Rev. A

This manual contains IMPORTANT
WARNINGS AND INSTRUCTIONS
READ AND RETAIN FOR REFERENCE

Grease Dispense Kit


5000 psi (350 bar) Maximum Fluid Working Pressure

Model 236-058

For dispensing heavy grease

WARNING

This dispense kit is designed to be used only with non-corrosive and non-abrasive lubricants and greases. Any other use of the equipment can cause unsafe operating conditions and component rupture, which can result in fluid injection or other serious bodily injury, or fire or explosion.

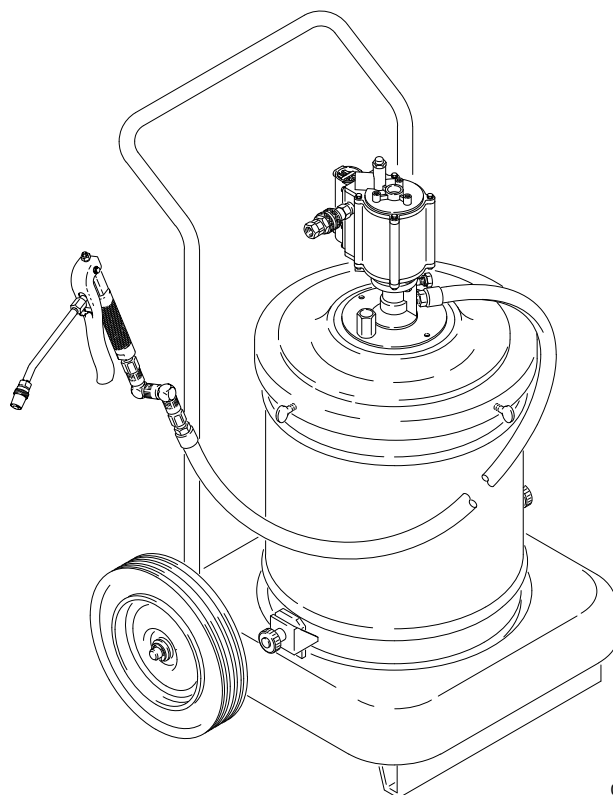

01978


*Dispense Kit shown installed.
Pump, cart, pail and cover are not included.*

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

© COPYRIGHT 1993, GRACO INC.

INSTALLATION

1. Use the two gun holders (6) to secure the pump (A) to the container cover.
2. Screw the nipple (4) into the pump air inlet.
3. Screw the quick disconnect coupler (3) onto the air supply hose (B). Do not connect the coupler to the nipple (4) yet.
4. Screw the fluid hose (1) into the pump fluid outlet.
5. Screw the z-swivel (5) into the dispense valve (2).
6. Connect the fluid hose (1) to the z-swivel (5).
7. Connect the coupler (3) to the nipple (4). Operate the pump according to the instructions in the separate pump manual.

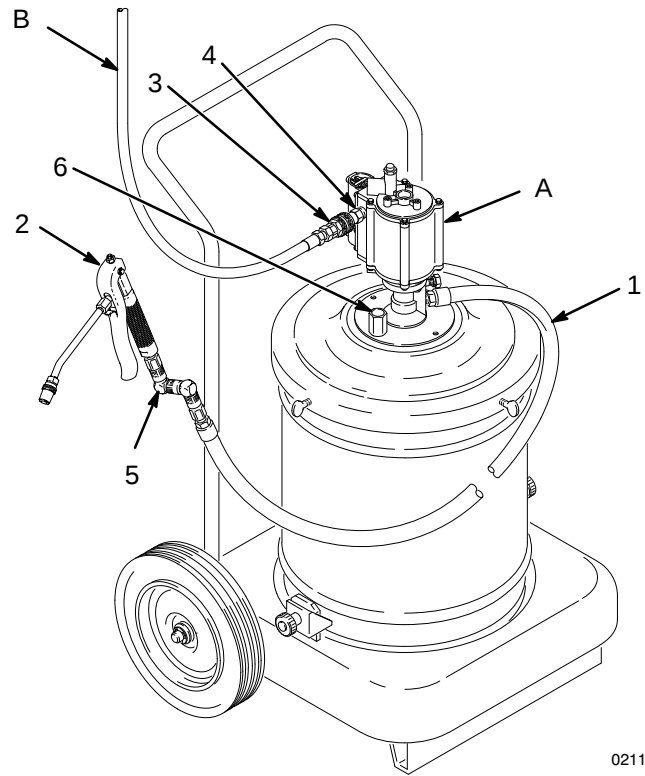


02111

PARTS DRAWING & LIST

Dispense Kit 236-058

Includes items 1-6

REF NO.	PART NO.	DESCRIPTION	QTY
1	109-151	HOSE; buna-N; 1/4 npt(mbe); 12 ft (3.7 m) long	1
2	223-903	VALVE, dispense; See manual 308-112	1
3	208-536	COUPLER, quick disconnect	1
4	169-971	NIPPLE, quick disconnect	1
5	202-577	Z-SWIVEL; 1/4 npt (m x f)	1
6	188-843	HOLDER, valve	2

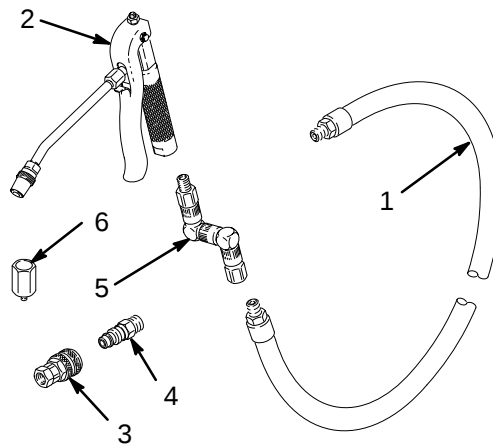

01974

TECHNICAL DATA

Maximum fluid working pressure 5000 psi (350 bar)
 Wetted parts Carbon Steel; Leather; Buna-N
 Refer also to supplied component manuals.

Sales Offices: Atlanta, Chicago, Dallas, Detroit, Los Angeles, Mt. Arlington (N.J.)
Foreign Offices: Canada; England; Korea; Switzerland; France; Germany; Hong Kong; Japan

GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441

PRINTED IN U.S.A. 308-303 5/93